

ESSENTIAL, in terms of reducing cleaning costs



Mr scrubbing machines. They have everything you need with the necessary quality... ... for safety,



M

Automatic swing-in of the brush head when accidentally impacted



When accidentally impacted, the squeegee is uncoupled to prevent dangerous situations




Thanks to the very low acoustic pressure level cleaning activities can be performed even in highly noise-sensitive environments such as in nursing homes, hospitals and public areas, without disturbing the environment or

the people who live in it

... for maximum performance!



The reduced turning circle allows the Mr to easily turn around in corridors or supermarket aisles



Perfect for effective wall to wall cleaning

Available equipment:

STANDARD EQUIPMENT	Mr60 B	Mr65-75-85 B 100 B 70 S
Water and detergent management		
FWF (Fimap Water Flow)	-	• (Mr65-75-85-100 B) - (Mr70 S)
Eco On/OFF System*	•	• (Mr65-75-85-100 B) - (Mr70 S)
Fast water filling with drip stop	•	•
Water level indicator	•	•
Scrubbing performance		•
Adjustable brush pressure	-	• (Mr65-75-85 B) - (Mr100 B - 70 S)
Squeegee with rubber blades usable on 4 sides	•	•
Variable scrubbing head	-	• (Mr65-75-85 B) - (Mr100 B - 70 S)
3-stage suction motor	optional	optional

STANDARD EQUIPMENT	Mr60 B	Mr65-75-85 B 100 B 70 S
Comfort		
FNC (FimapNoiseCanceling)	•	•
Fully sanitizable tanks	•	•
Programme selector	-	- (Mr65-75-85-100 B) • (Mr70 S)
Step-through access	•	•
On-board battery charger	optional	optional
Hour meter	•	•
Battery charge level	٠	•
FFF (FimapFastFill)	-	(Mr65-75-85-100 B) (Mr70 S) optional
Safety		
Anti-skid and non-marking front drive wheel	•	•
Anti-skid and non-marking rear wheels	•	•
Mechanical service and parking brakes	•	•
Blinking light	optional	optional
Squeegee with shock-resistant coupling (BREAK AWAY)	•	•
Scrubbing head with impact-elicited swinging in (SHOCK PROOF)	•	• - (Mr70 S)
Dead man's switch	•	•
Horn	•	•

* Eco ON/OFF system: automatically stops water flow and brush when the machine is idle.




Mr scrubbing machines. Use operations: The ESSENTIAL

Mr is very simple and intuitive to drive: USER FRIENDLY, as easy as 1, 2, 3!




ESSENTIAL, in the cost of cleaning

Mr. A new working method! Mr60: the same size as a traditional walk-behind scrubbing machine AT THE SAME PRICE!

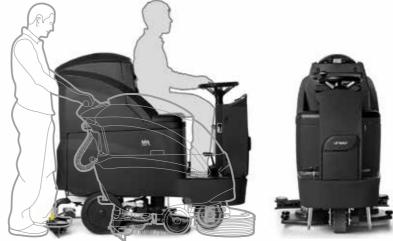


Working width: Mr65 B 660 mm Mr75 B 760 mm Mr85 B 845 mm Mr100 B 1020 mm Mr70 S 690 mm





Mr can clean 1 sq.m of floor for just 1 cent*

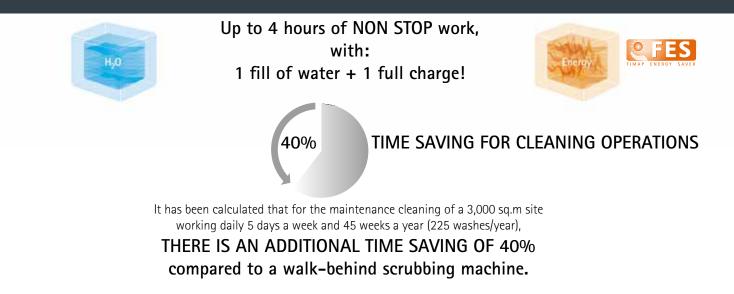

* For further information, contact the Sales Office

t checkouts. Can be transported between floors in a standard lift



ESSENTIAL, for every day maintenance operations...

... maintenance has never been so easy and quick. Easily performed by any operator, even untrained



MR

TECHNICAL DATA		Mr60 B	Mr65 B	Mr75 B	Mr85 B	Mr100 B	Mr70 S
Productivity theoretical	up to sqm/h	3660	3900	4500	5100	6060	4140
Working width	mm	615	660	760	845	1020	690
Disc brushes	(no.) Ø mm	(1) 610	(2) 340	(2) 390	(2) 430	(2) 510	-
Cylindrical brushes	(no.) Ø mm	-	-	-	-	-	(1) 210x690
Brush motors	(no.) V/W	(1) 24/500	(2) 24/500	(2) 24/500	(2) 24/500	(2) 24/600	(1) 24/560
Brush rpm	rpm	140	140	140	140	120	520
Brush pressure	kg	30	30÷60	30÷60	30÷60	30	20
Solution tank		110	110	110	110	110	110
Recovery tank		125	125	125	125	125	125
Suction motor	V/W	24/410	24/410	24/410	24/410	24/410	24/410
Vacuum water lift	mbar	160	160	160	160	160	160
Maximum volume of the debris hopper		-	-	-	-	-	10
Supply/traction	V	24/aut.	24/aut.	24/aut.	24/aut.	24/aut	24/aut.
Batteries	(no.) V/Ah C5	(4) 6/180	(4) 6/180	(4) 6/180	(4) 6/180	(4) 6/180	(4) 6/180
Battery run time	up to h	3	2,15	2,15	2,15	1,90	2,15
Transport speed	km/h	6	6	6	6	6	6
Gradeability during transport empty	0/0	10	10	10	10	10	10
Traction motor	V/W	24/400	24/400	24/400	24/400	24/400	24/400
Machine dimensions (L x h x w)	mm	1510x1320x680	1510x1320x685	1510x1320x780	1510x1320x855	1510x1320x1035	1510x1320x805
Squeegee width	mm	800	990	990	1105	1105	970
Machine weight empty without batteries	kg	223	223	223	223	223	223
Batteries weight	kg	124	124	124	124	124	124
Minimum aisle turn	mm	2360	2360	2360	2360	2360	2360

CERTIFICATIONS



For any additional information or for a demo please contact your usual Fimap dealer



FIMAP spa - Via Invalidi del Lavoro, 1 - 37059 S. Maria di Zevio - Verona - Italy Tel. +39 045 6060411 - Fax +39 045 6060417 - E-mail: fimap@fimap.com

f in D y 💿

Fimap Spareserves the right, at anytime, to make technical and/or equipment modifications without prior notification. The images are shown as reference only and are not binding as to the actual design and/or equipment - Copyright © Fimap 2010 - COD. 301601 - AH - 12-2021